

ELGEF® Plus

53 91 16




Elektromufa
z zaciskami montażowymi

PE 100 SDR11 (ISO S5)

10 bar gaz / 16 bar woda

- 4 mm końcówki, wskaźniki poprawności zgrzewu
- usuwalny ogranicznik wsuwu



d	Kod	SID	GP	kg	d1	L
20	753 911 606	1	50	0,054	31	68
25	753 911 607	1	50	0,060	36	68
32	753 911 608	1	50	0,072	44	72
40	753 911 609	1	50	0,100	54	80
50	753 911 610	1	10	0,136	66	88
63	753 911 611	1	10	0,194	81	96

53 91 16




Elektromufa

bez zacisków montażowych

PE 100 SDR11 (ISO S5)

10 bar gaz / 16 bar woda

- 4 mm końcówki, wskaźniki poprawności zgrzewu
- usuwalny ogranicznik wsuwu (do średnicy d 160)



d	Kod	SID	GP	kg	d1	L
75	753 911 612	1	10	0,287	96	110
90	753 911 613	1	10	0,421	113	125
110	753 911 614	1	5	0,697	138	145
125	753 911 615	1	5	0,738	154	158
140	753 911 616	1	5	0,968	172	168
160	753 911 617	1	6	1,390	196	180
180	753 911 618	1	4	1,750	214	190
200	753 911 619	1	2	2,350	237	202
225	753 911 620	1	2	3,160	267	220
250	753 911 621	1	1	5,588	325	225
280	753 911 622	1	1	7,353	365	225
315	753 911 623	1	1	9,121	405	225
355	753 911 624	1	1	12,110	425	245
400	753 911 625	1	1	15,993	463	245

53 91 18




Elektromufa

bez zacisków montażowych

PE100 SDR17 (ISO S8)

5 bar gaz / 10 bar woda


- 4 mm końcówki, wskaźniki poprawności zgrzewu



d	Kod	SID	GP	kg	d1	L
160	753 911 817	3	2	1,050	186	180
180	753 911 818	1	4	1,450	202	190
200	753 911 819	3	2	1,700	224	202
225	753 911 820	3	2	2,290	252	220
250	753 911 821	1	2	3,120	287	247
280	753 911 822	1	1	5,675	340	252
315	753 911 823	1	1	5,480	360	271
355	753 911 824	1	1	8,200	414	246
400	753 911 825	1	1	15,993	463	246
450	753 911 826	1	1	15,500	522	290
500	753 911 827	1	1	19,000	579	290

ELGEF® Plus

53 91 18

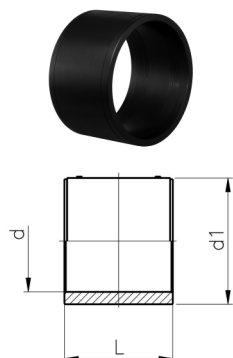

Elektromufa

- PE 100 SDR 17 (ISO S8)
- 5 bar Gaz / 10 bar Woda
- 4 mm końcówki
- Wskaźnik poprawności zgrzewu
- 2 oddzielne strefy zgrzewu
- **Montaż za pomocą zestawu montażowego 799 301 561**
- Wymagana zgrzewarka zapewniająca stabilną moc wyjściową 2500 W
- Agregat prądowłrczy o minimalnej mocy wyjściowej 5 kW (dla zgrzewarek MSA 4kW)

d [mm]	Kod	SP	GP	kg	d1 [mm]	L [mm]	
560	753 911 828	-	-	25.500	638	392	
630	753 911 829	-	-	35.000	716	442	

ELGEF® Plus

Elektromufa długa



- PE 100 SDR 11 (ISO S5)
- 10 bar Gaz / 16 bar Woda
- 4mm końcówki
- ogranicznik wsuwu

d [mm]	Kod	SP	GP	kg	d1 [mm]	L [mm]	z [mm]	
32	753 911 208	-	-	0.084	44	104	2	
40	753 911 209	1	128	0.135	56	121	2	
50	753 911 210	1	96	0.215	68	139	2	
63	753 911 211	1	48	0.318	82	166	2	